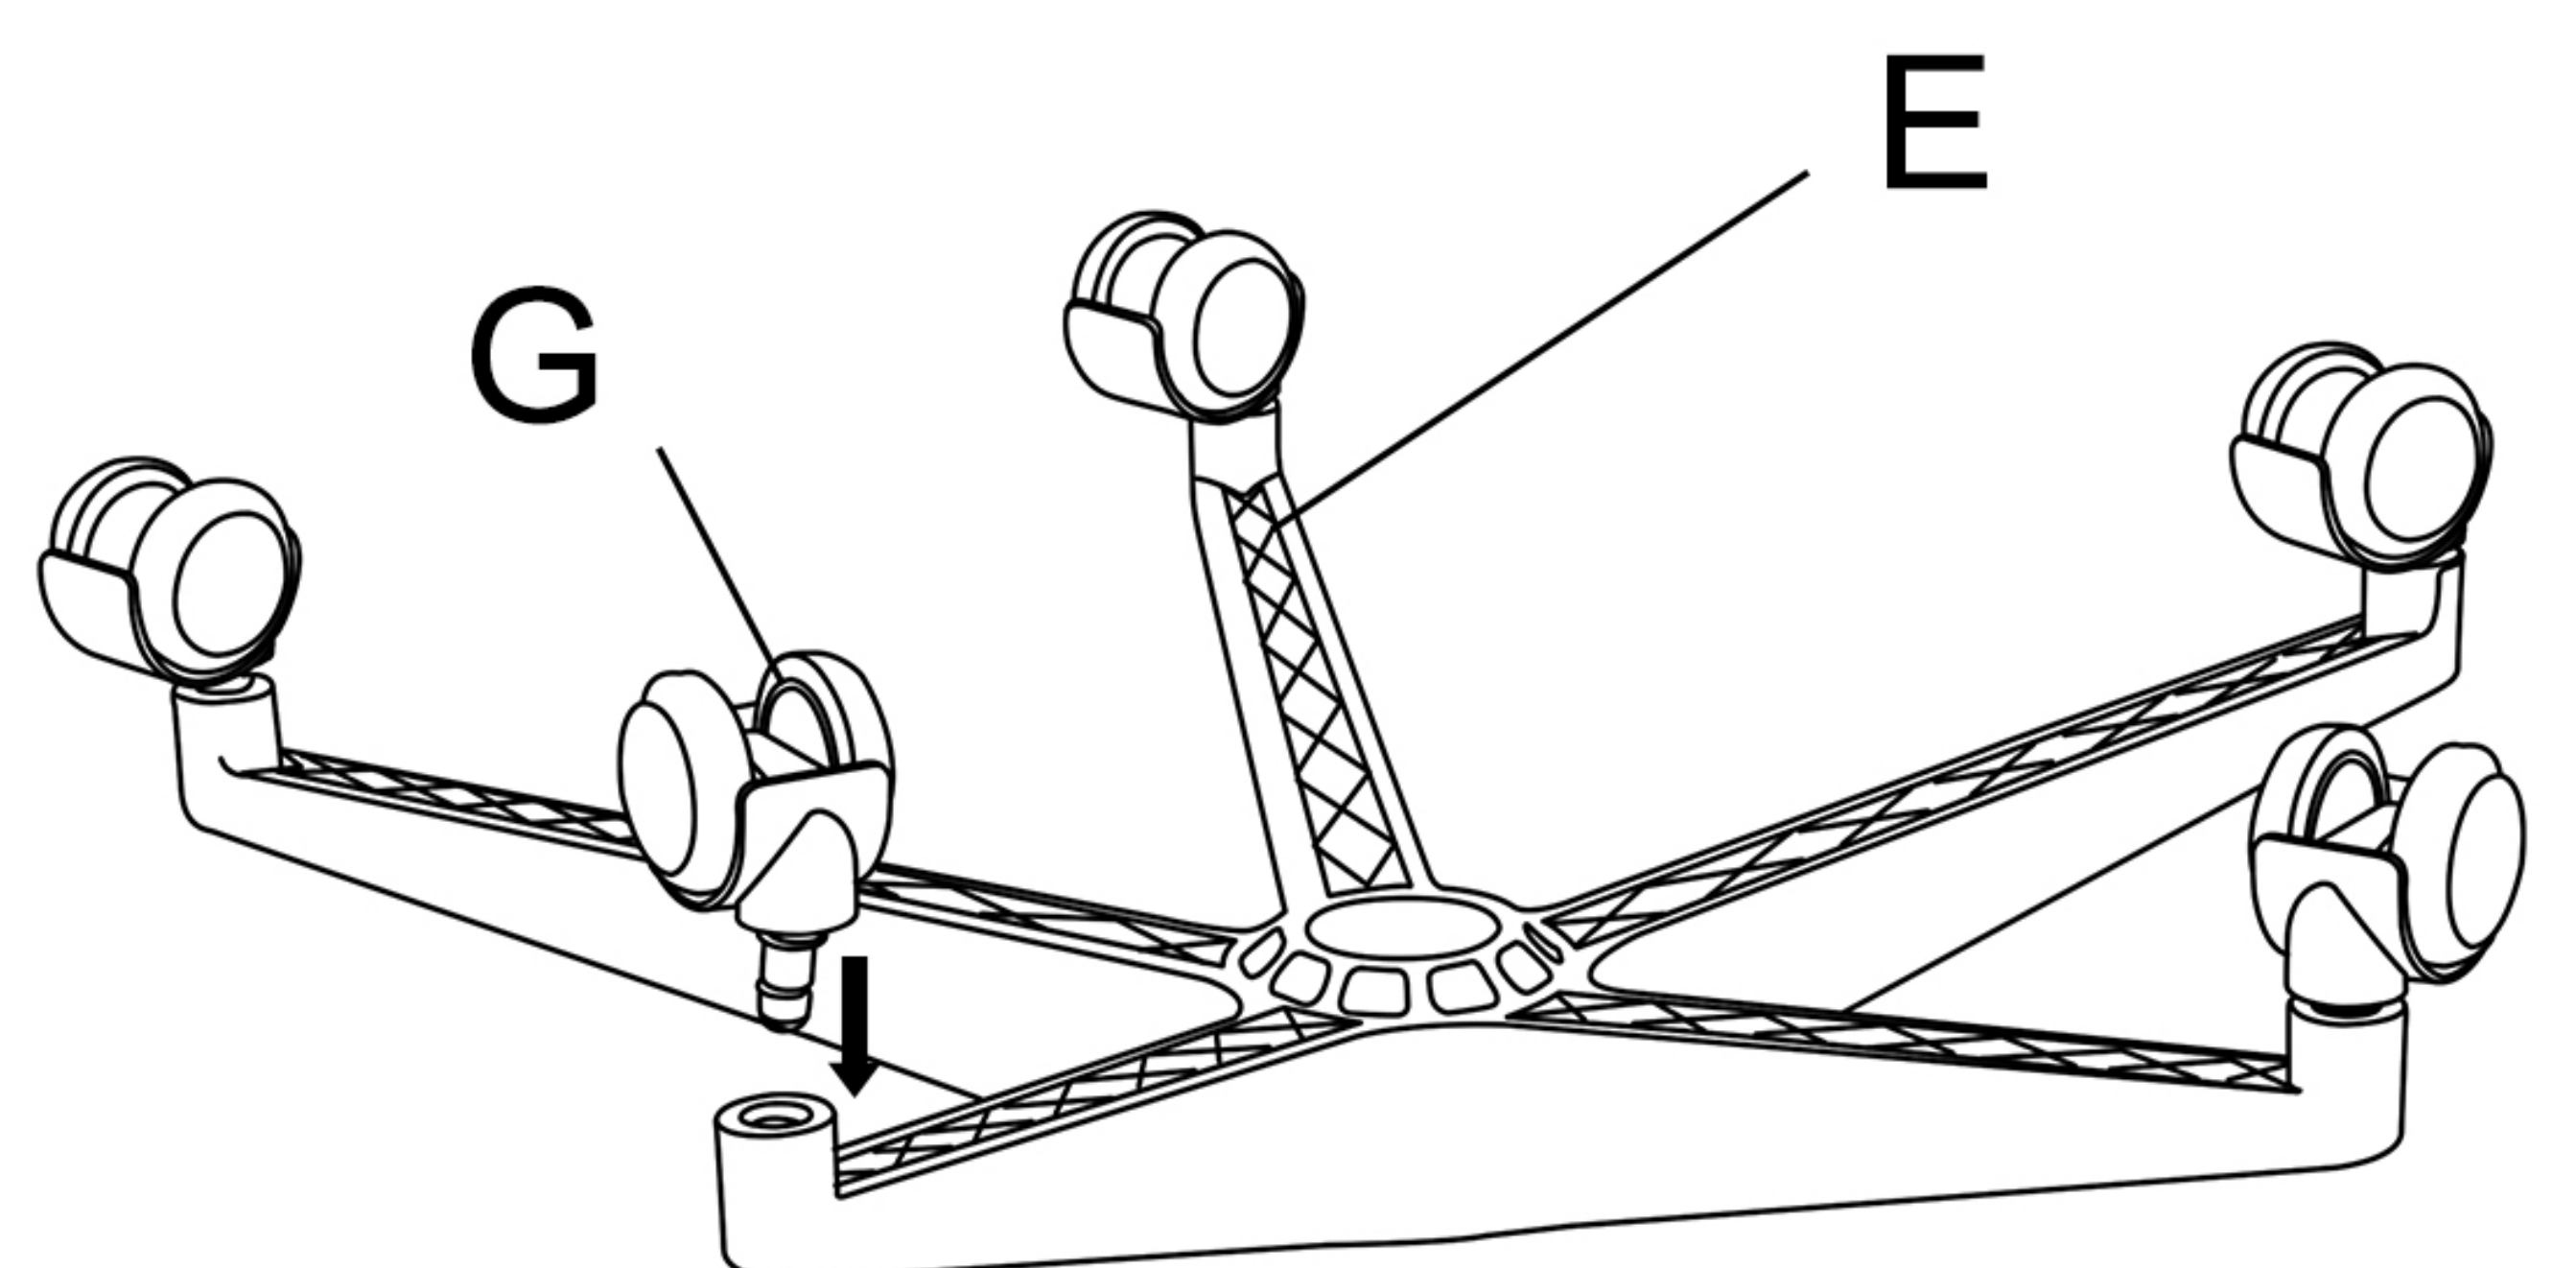
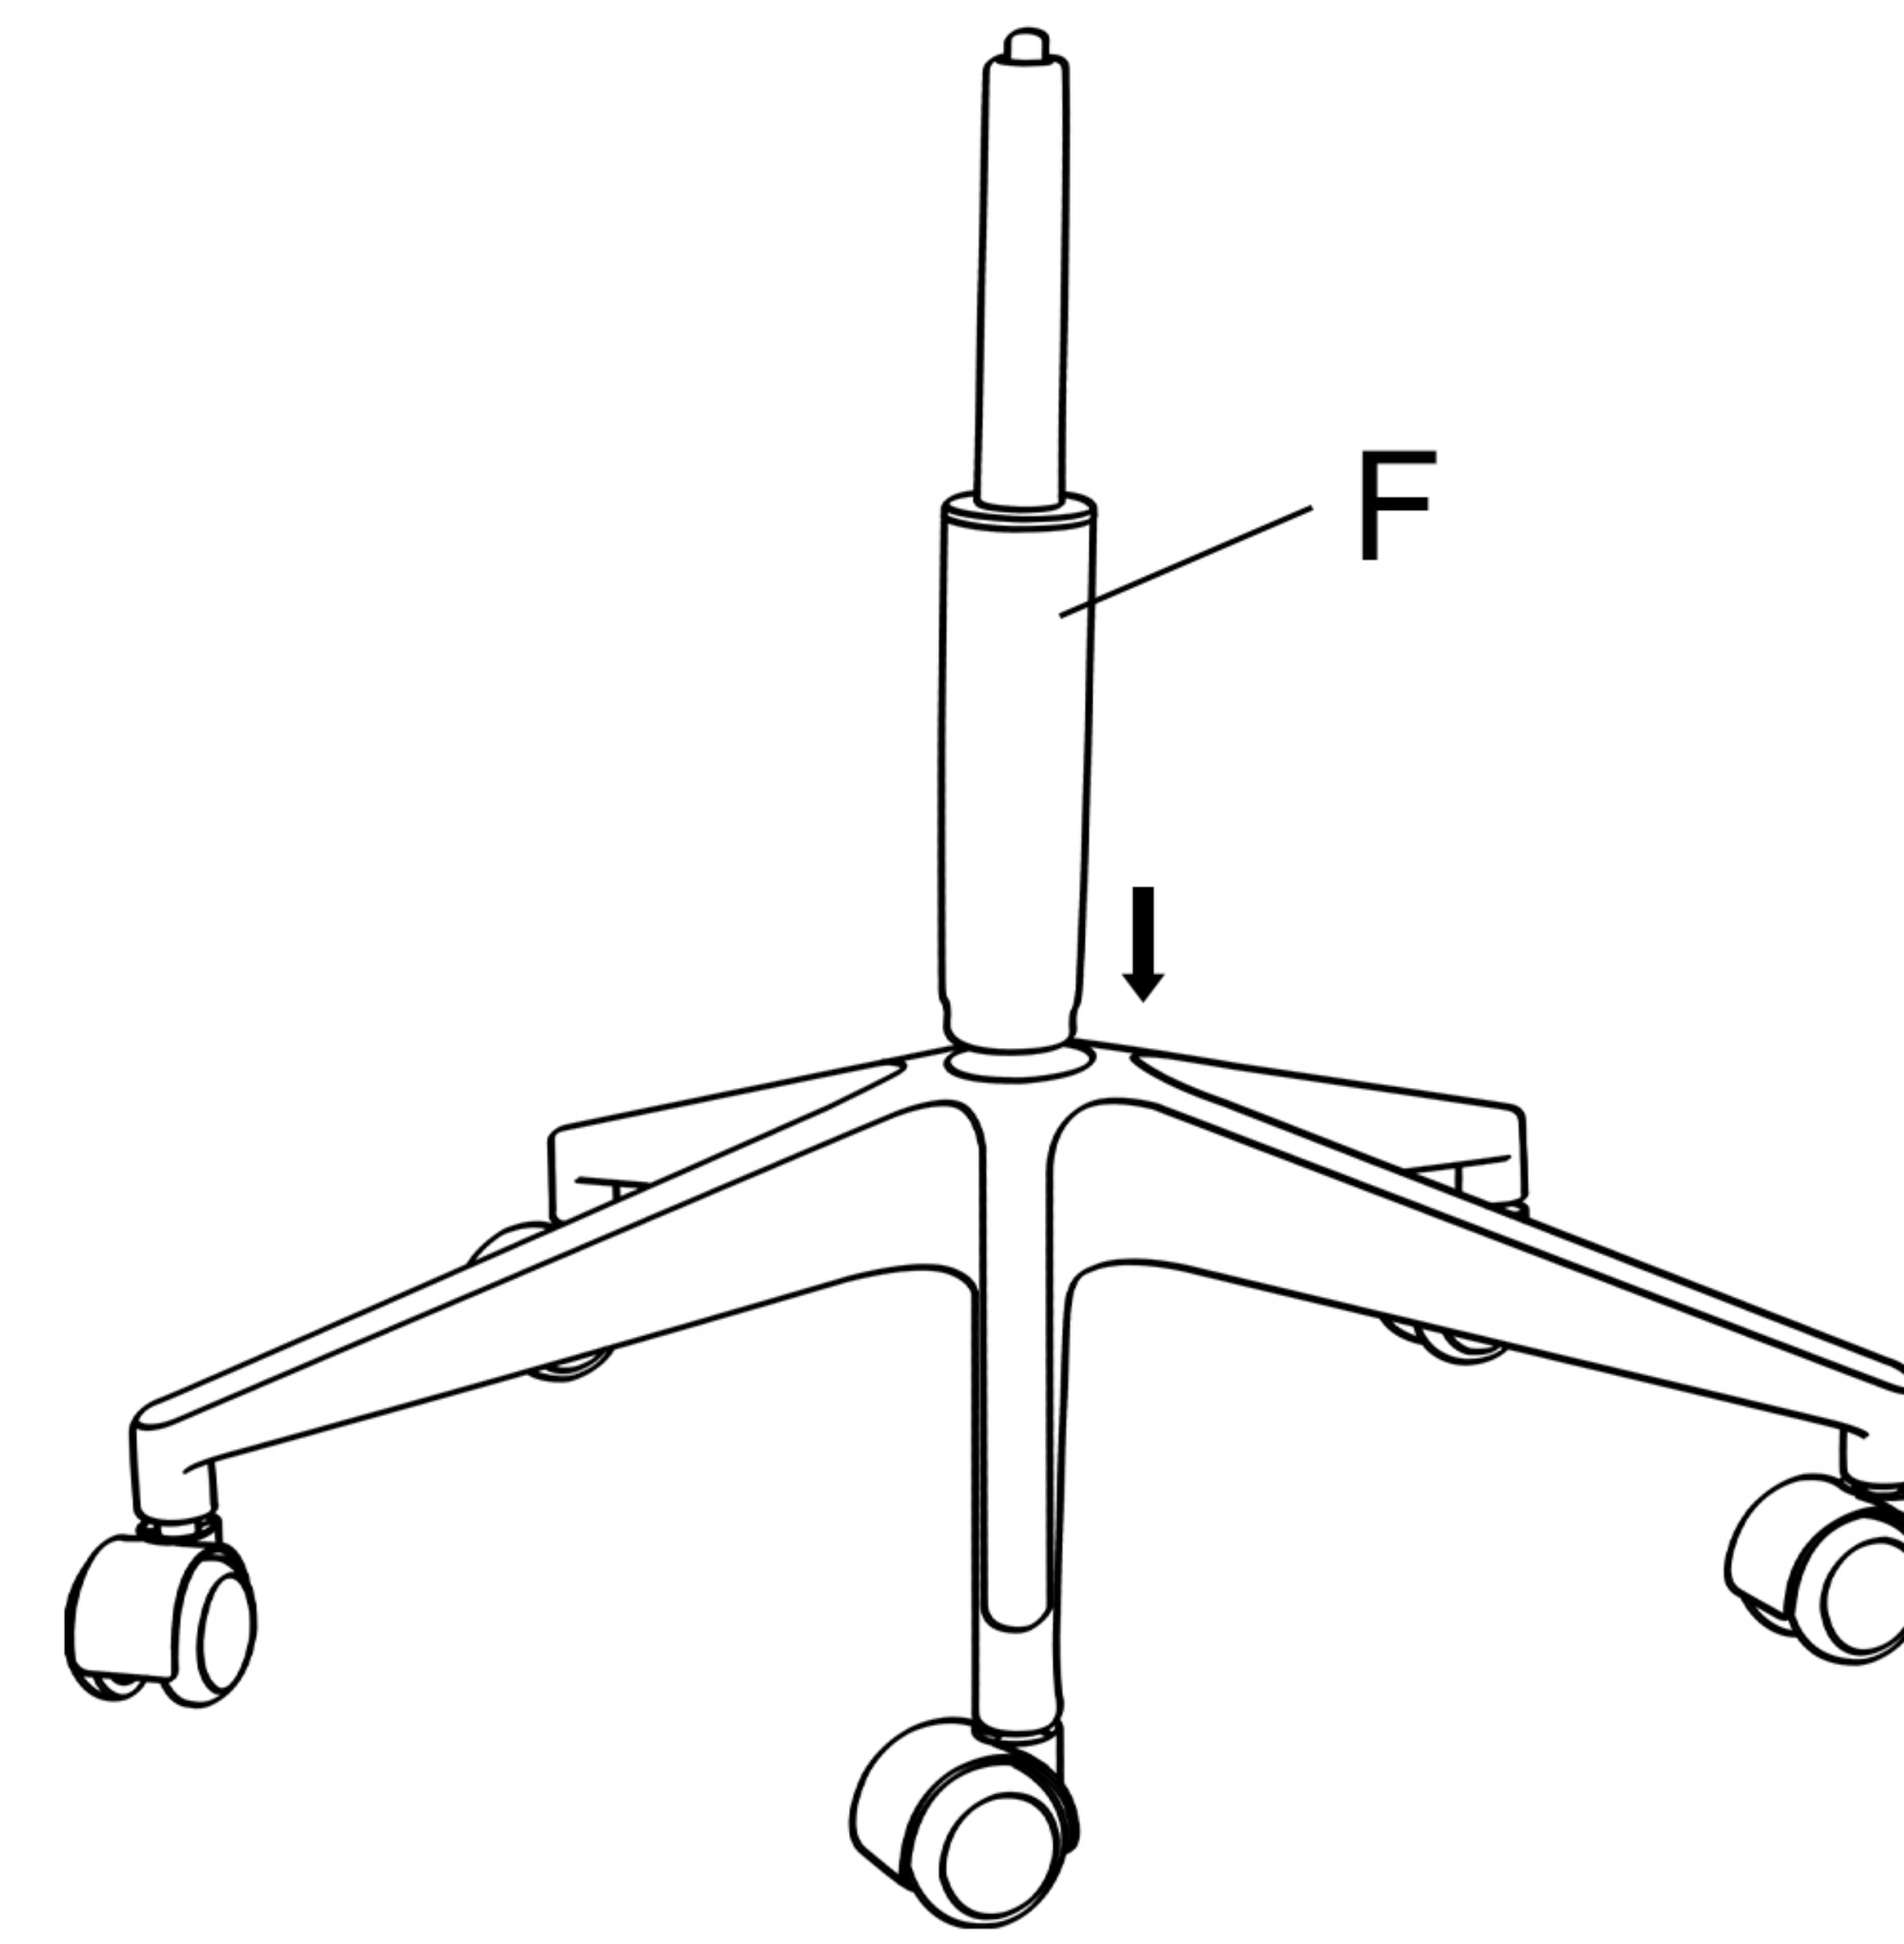
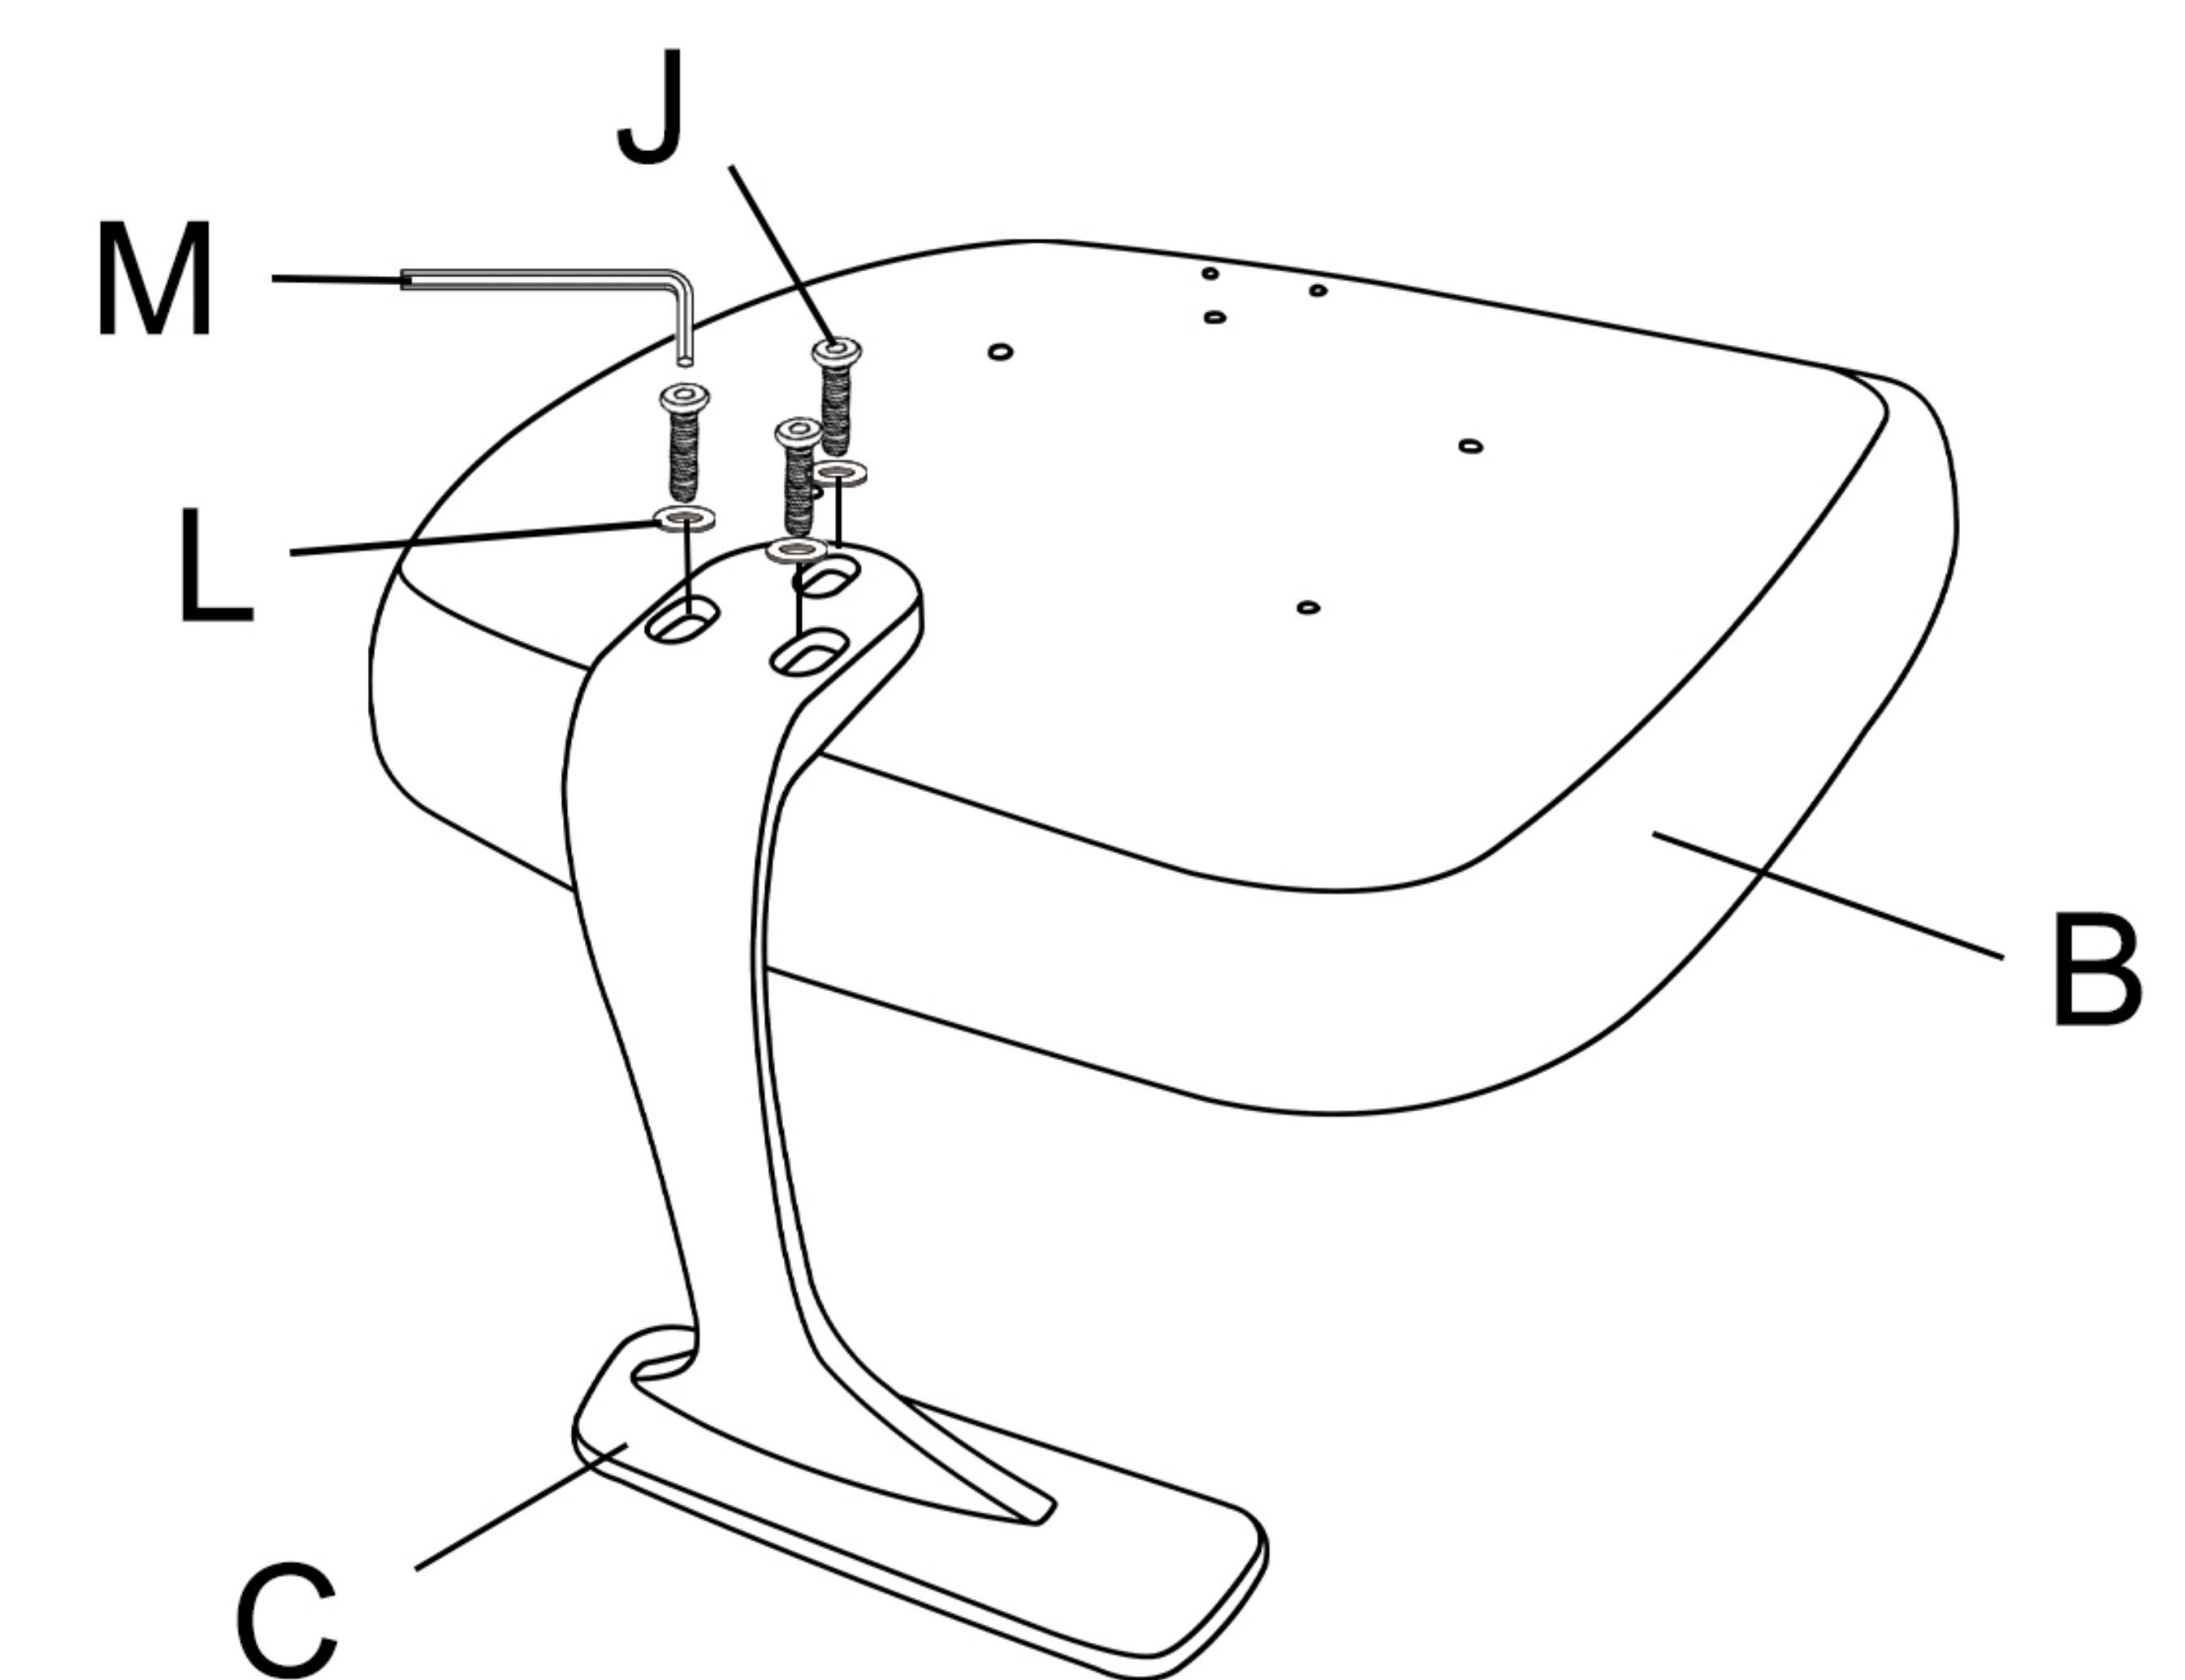
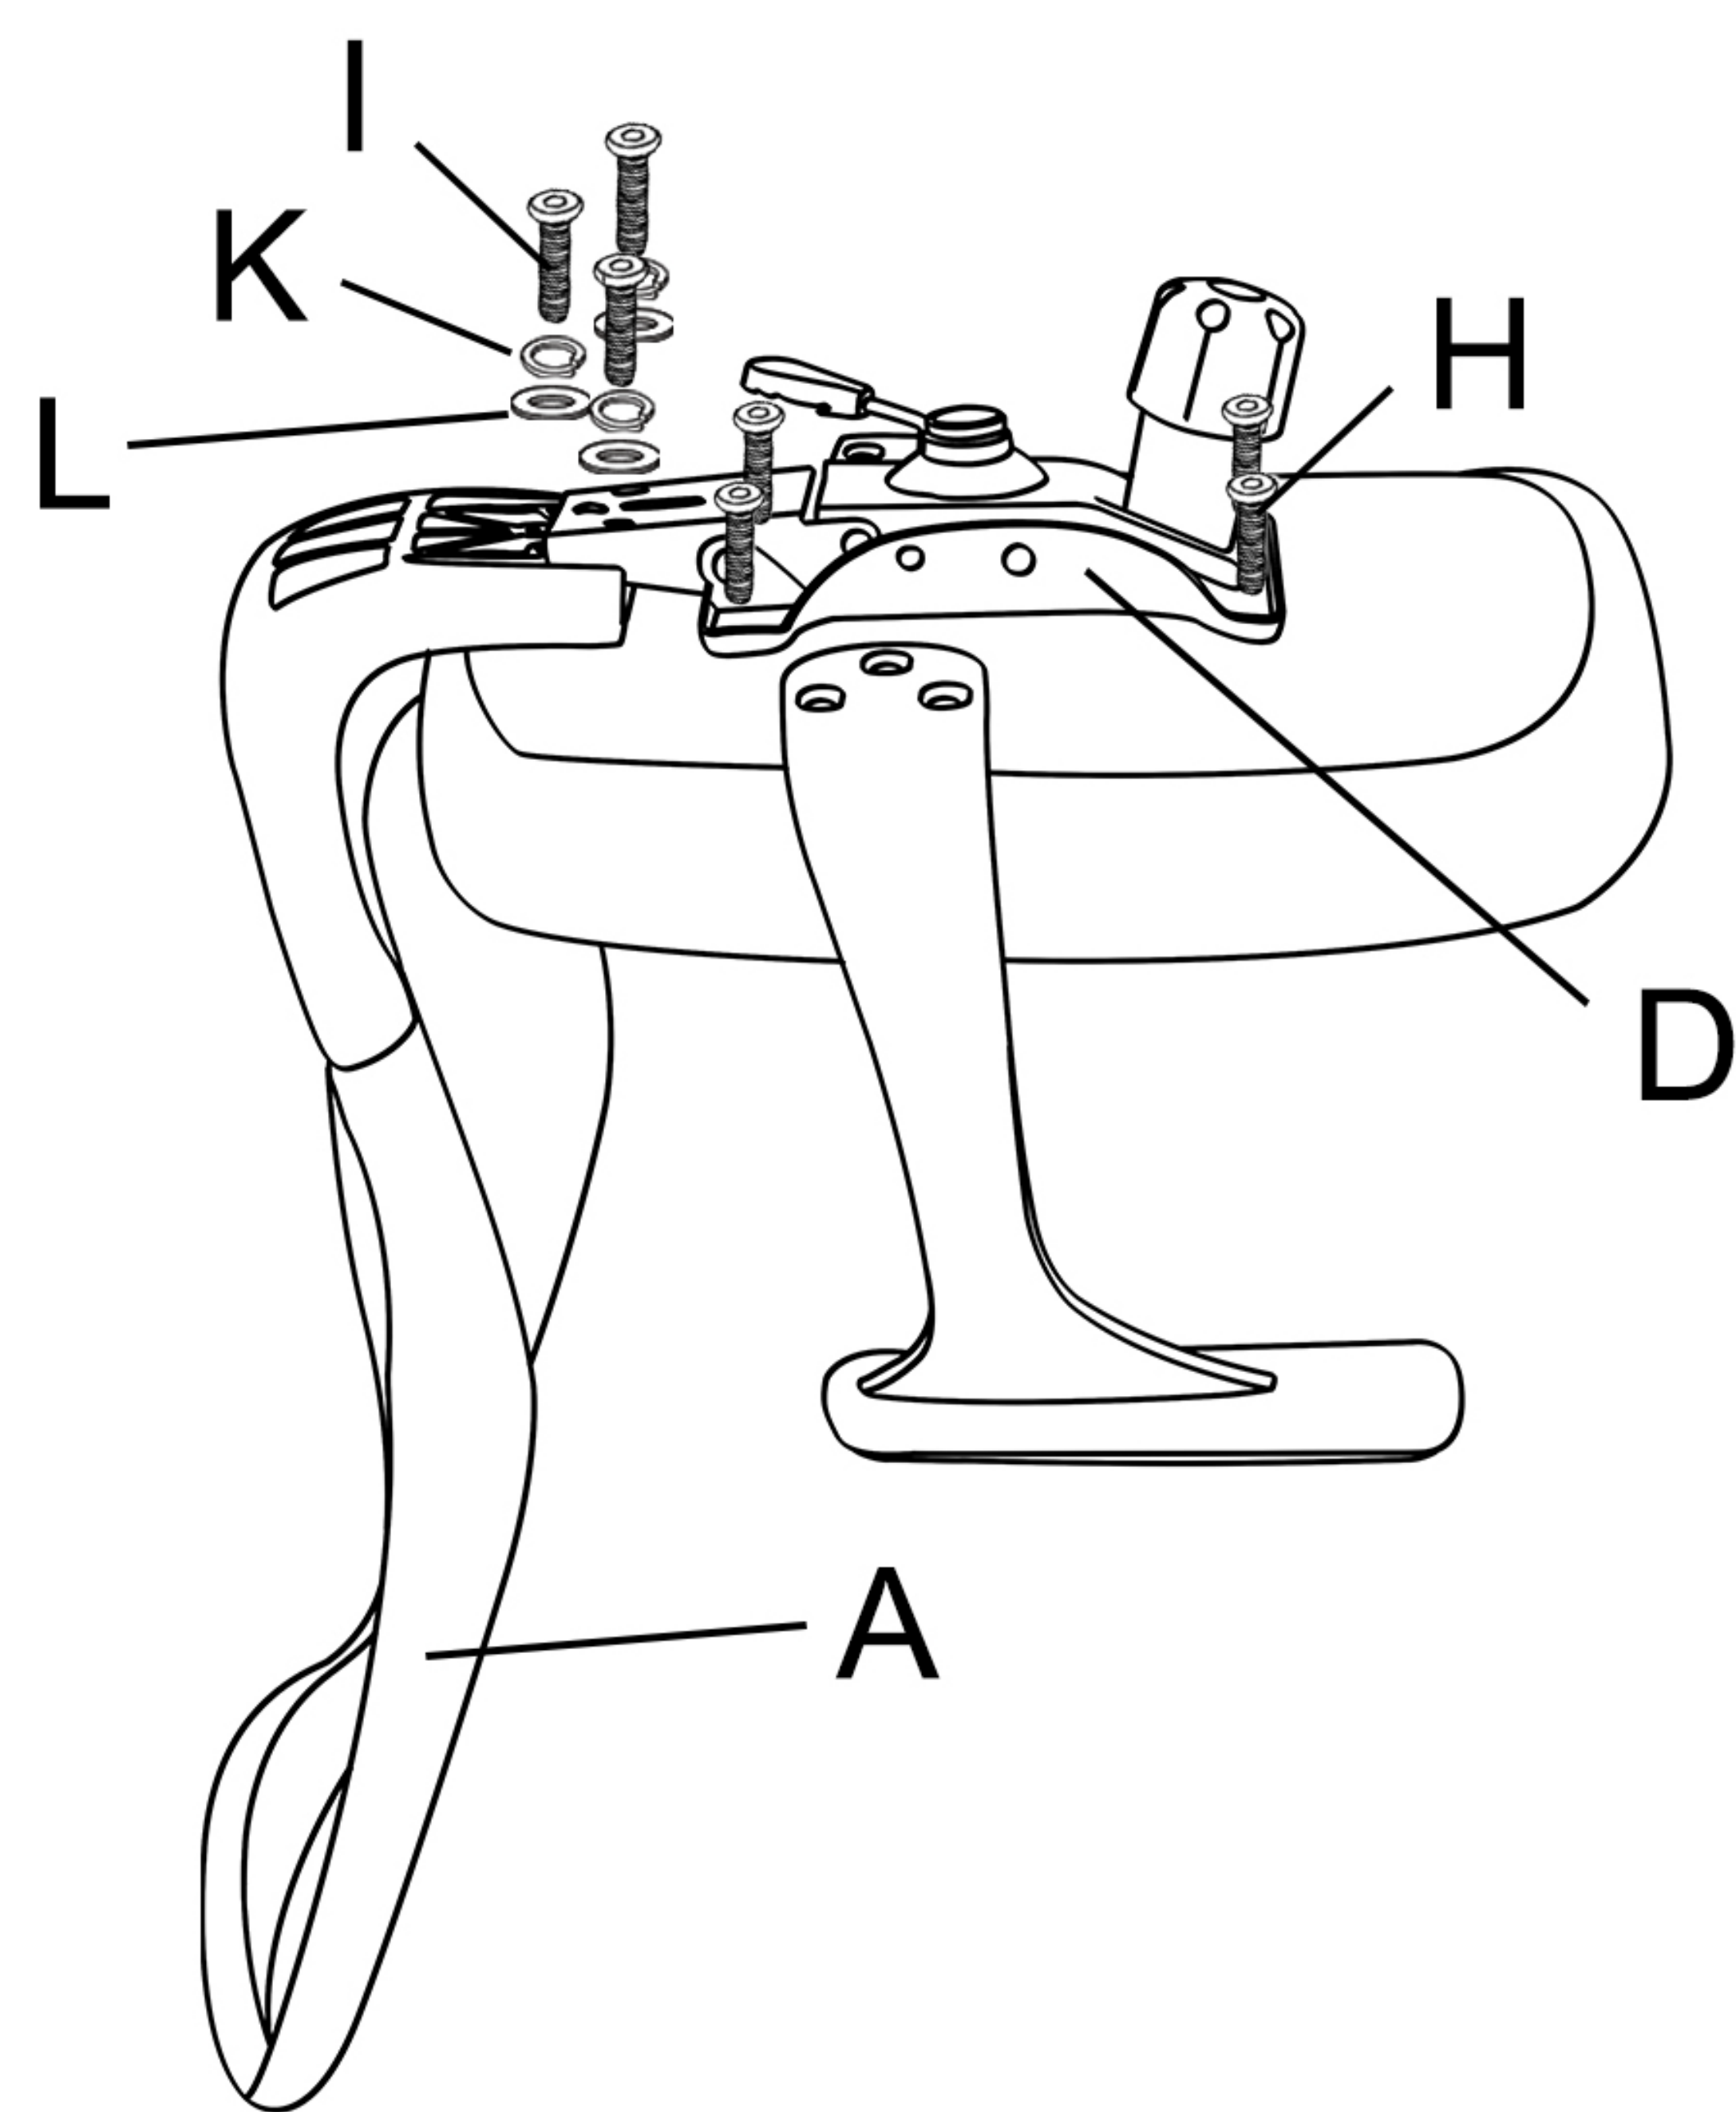
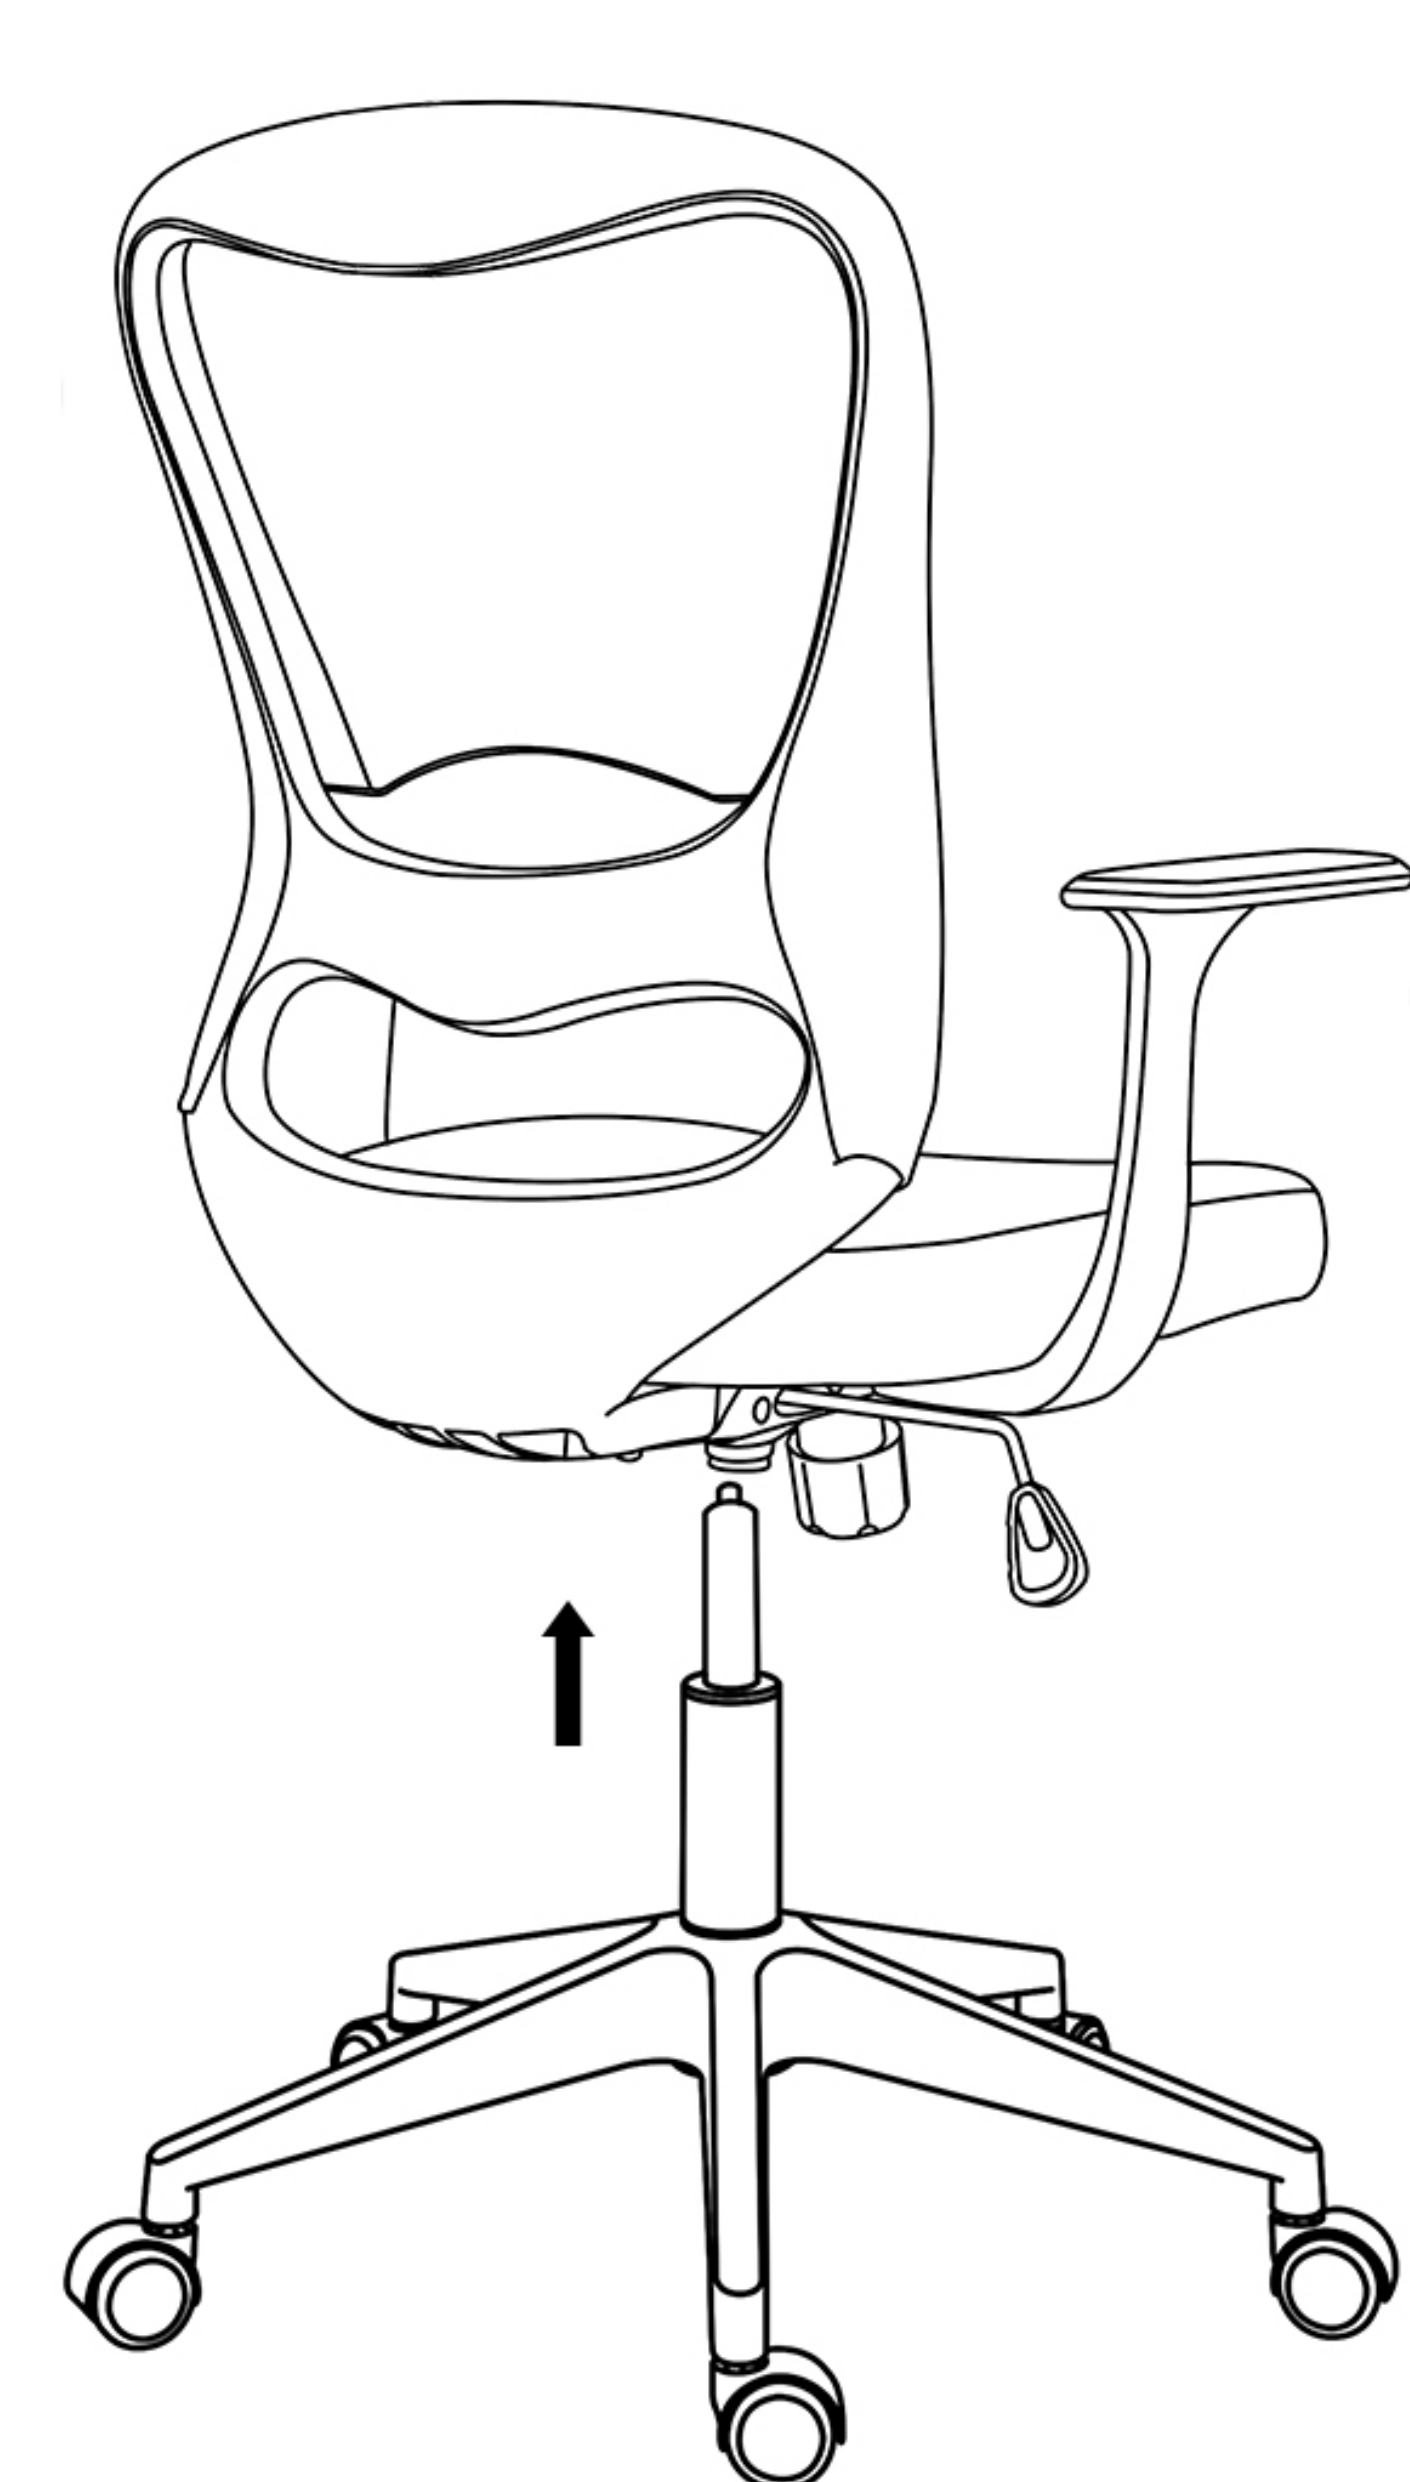


ASSEMBLY INSTRUCTIONS

A. Backrest x 1 B. Seat x 1 C. Armrests x 2 D. Salver x 1 E. Base x 1 F. Gaslift x 1 G. Wheels x 5 H. Screws x 4 (M6 x 16) I. Screws x 3 (M8 x 16) J. Screws x 6 (M6 x 30) K. Lock washers x 3 (M8 x 12) L. Flat washers x 9 (M8 x 17) M. Hex key x 1	 Diagram 1 shows the base (E) with five wheels (G) being attached. An arrow points to the wheel being installed. 1	 Diagram 2 shows the gaslift (F) being inserted into the base (E). An arrow points down into the central hole. 2	 Diagram 3 shows the seat (B) being attached to the armrests (C) using screws (J) and washers (L). An arrow points to the screw being inserted. 3
	 Diagram 4 shows the backrest (A) being attached to the seat (B) using screws (I), lock washers (K), and flat washers (L). An arrow points to the screw being inserted. 4	 Diagram 5 shows the seat (B) being attached to the gaslift (F) using screws (J) and washers (L). An arrow points up to the seat being attached. 5	 Diagram 6 shows the final assembled chair. 6

Remark: First fix screws lightly by hand and at the end of the assembly fasten the screws firmly with tools.